



Aquanex Underwater Camera Bracket

The bracket consists of an expandable shaft, camera clip, bracket screw, gutter plates, and wing nut.

Slide the camera into the camera clip at the bottom of the shaft.

Turn the shaft over and carefully push the camera down on the clip until it snaps.

Adjust the expandable shaft as necessary. Secure the shaft with a wing nut.


Slide the bracket screw into the top hole in the shaft.

Screw the wing nut on the bracket screw until the gutter plates are about the same distance apart as the gutter width.

Lower the bracket onto the lip of the gutter so that one gutter plate is on each side of the lip.

Tighten the wing nut until the gutter plates are secure against the gutter lip. (Or, use the threaded gutter plate.)

Don't overtighten the wing nut. The bracket screw should lie flat on the gutter.

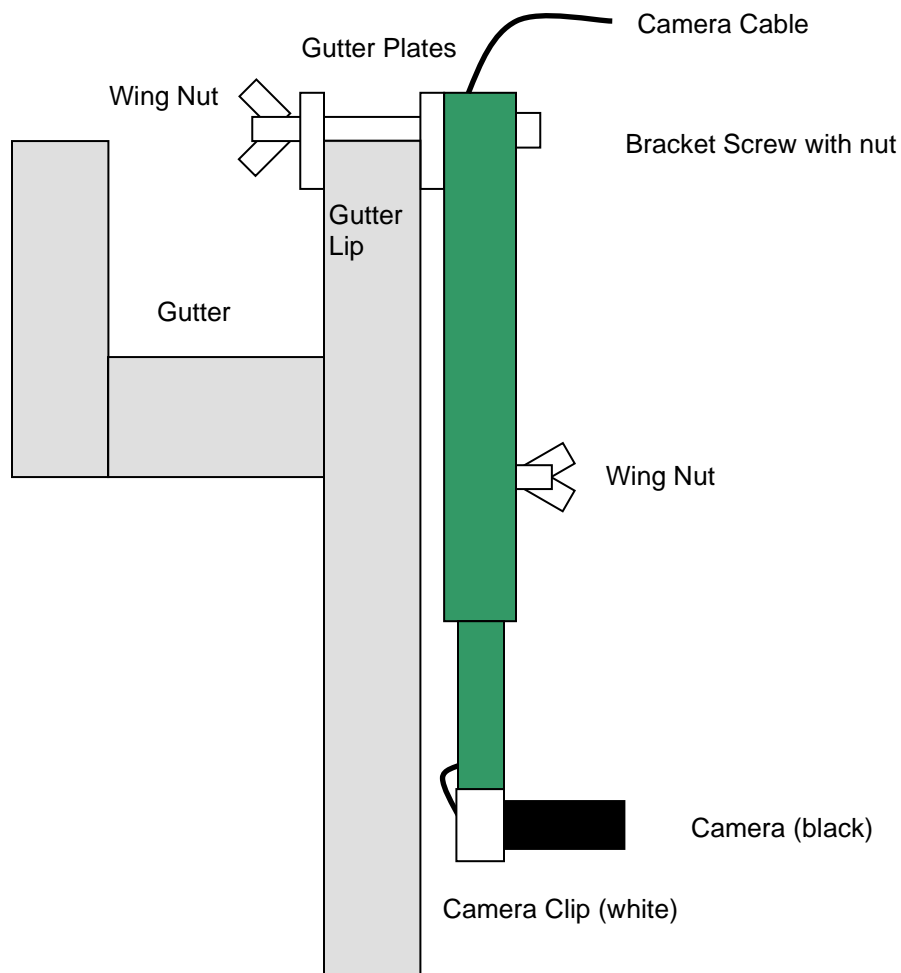

After the wing nut is tight, check that the bracket screw is parallel to the top of the gutter lip and that the shaft is parallel to the wall.

To adjust the aim, the camera can be rotated in the clip and the clip can be rotated from side to side.